



Aqua Compact 3-18kW

Electric heater made of reinforced thermoplastic for extra strength. Heating element made of Incoloy 825 or titanium for extra safety in installations where there is a high risk of corrosion, e.g. salt water pools.

Supplied with a thermostat for adjusting pool temperature as well as overheating cut out and flow switch.

Minimum flow 90 l/min. Max. pressure: 2.5 bar.

Technical data

Incoloy 825 heating element			Titanium heating element			Ampere 3-phase		
Item no.	Type	kg	Item no.	Type	kg	kW	230V	400V
141600	AC30	1.7	141600T	AC30T	1.7	3.0	8	5
141601	AC60	1.7	141601T	AC60T	1.7	6.0	15	9
141602	AC90	1.7	141602T	AC90T	1.7	9.0	23	14
141603	AC120	2.2	141603T	AC120T	2.2	12.0	31	18
141604	AC150	2.2	141604T	AC150T	2.2	15.0	38	22
141605	AC180	2.2	141605T	AC180T	2.2	18.0	46	27

Connections with 1 1/2" pipe or 1 1/2" threaded are available separate.

Aqua spa 1.5-2.0kW



A small, compact heater for spa pools and small swimming pools. It is available with capacities from 1.5 to 2.0 kW. The heater is made of thermoplastic and has a heating element made of Incoloy 825. Adjustable thermostat, overheating cut out and flow switch are standard.

Minimum flow 90 l/min.

Suitable for spa, hot tubs and smaller pools.

Technical data 1-phase 230V

Item no.	Type	kW	Length mm	Pipe connection	Ampere	kg
141650	AS15	1.5	200	Ø 50 mm	7	1.0
141651	AS20	2.0	200	Ø 50 mm	9	1.0

Connections with 1 1/2" pipe or 1 1/2" threaded are available separate.



Aqua HL 3-15kW

Aqua HL has a digital control, where the desired pool temperature can easily be set and the current pool temperature is shown in the LED display.

In addition to an overheating protection and a flow switch, the heater has built-in contactors, that simplifies the connection of the heater. Rated output 3-15 kW. Made of thermoplastic with heating element made of Incoloy 825 or titanium.

Minimum flow 90 l/min.



Technical data

Incoloy 825 heating element			Titanium heating element			Ampere 3-phase	
Item no.	Type	kg	Item no.	Type	kg	400V	415V
141800	D30	2.6	141800T	D30T	2.6	3.0kW 5A	3.5kW 5A
141801	D60	2.6	141801T	D60T	2.6	6.0kW 9A	6.5kW 9A
141802	D90	2.6	141802T	D90T	2.6	9.0kW 13A	10kW 14A
141803	D120	2.6	141803T	D120T	3.0	12.0kW 18A	13kW 18A
141804	D150	3.0	141804T	D150T	3.0	15.0kW 22A	16.2kW 23A
						1-phase 230V	3-phase 230V
141820	DS30-230	2.6	141820T	DS30T-230	2.6	3.0kW 13A	-
141821	DS60-230	2.6	141821T	DS60T-230	2.6	6.0kW 26A	-

Connections with 1 1/2" pipe or 1 1/2" threaded are available separate.

Sandfilter

Compact 3-18kW (2")

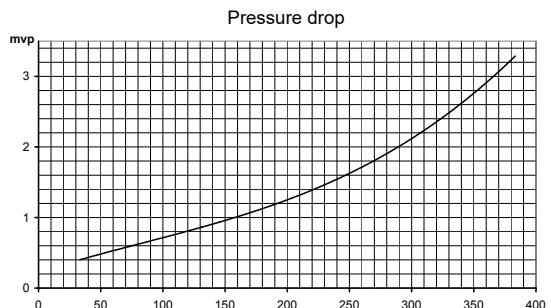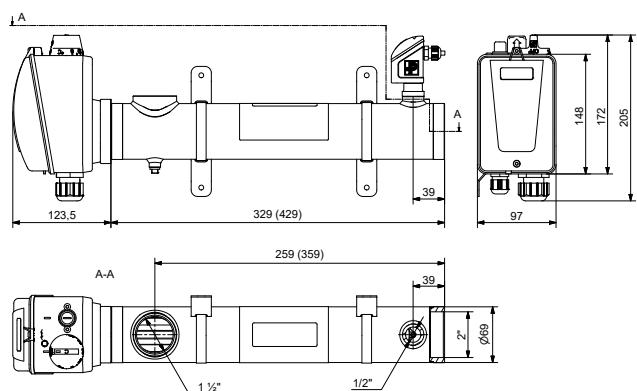

Dimensions for 9-18kW within brackets

Aqua Compact 3-18kW

