

Technical data		MFT260 Item no. 11377	MFT680 Item no. 11380
Capacity (at 60°C temperature difference)		75kW	200kW
Flow	Primary side	35 l/min	95 l/min
	Secondary side	300 l/min	600 l/min
Pressure drop	Primary side	0.9 mVp	0.1 mVp
	Secondary side	1.8 mVp	3 mVp
Max. temperature		120°C	120°C
Max. pressure	Primary side	10bar	10bar
	Secondary side	5bar	4bar


The product is intended for the following water values:

Total chlorine content:	max 3.5 mg/liter (ppm)*
Chlorine (salt) total:	max 35000 mg/liter
pH-value:	7.2 - 7.6
Alkalinity:	60-120 mg/liter (ppm)
Calcium hardness:	100-300 mg/liter (ppm)
Iron:	max 0.1 mg/liter *
Copper:	max 0.2 mg/liter *
Manganese:	max 0.05 mg/liter *
Phosphorus:	max 0.01 mg/liter *
Nitrate:	max 50 mg/liter *


Outside these values the product warranty does not apply

* Complies to EN 16713-3



Dimensions

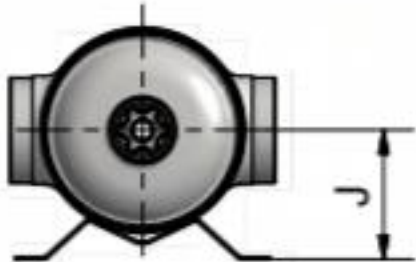

MFT260
Item no. 11377

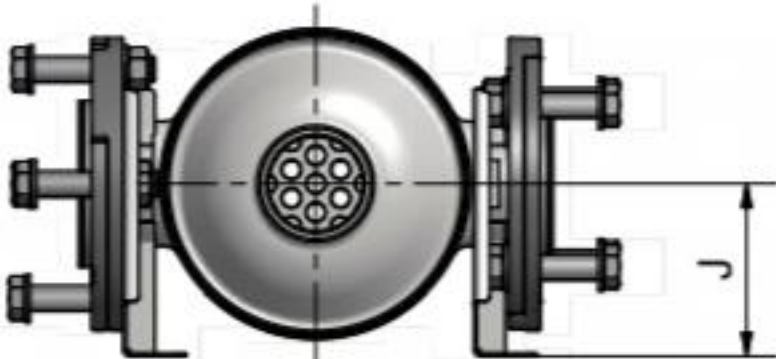

MFT680
Item no. 11380

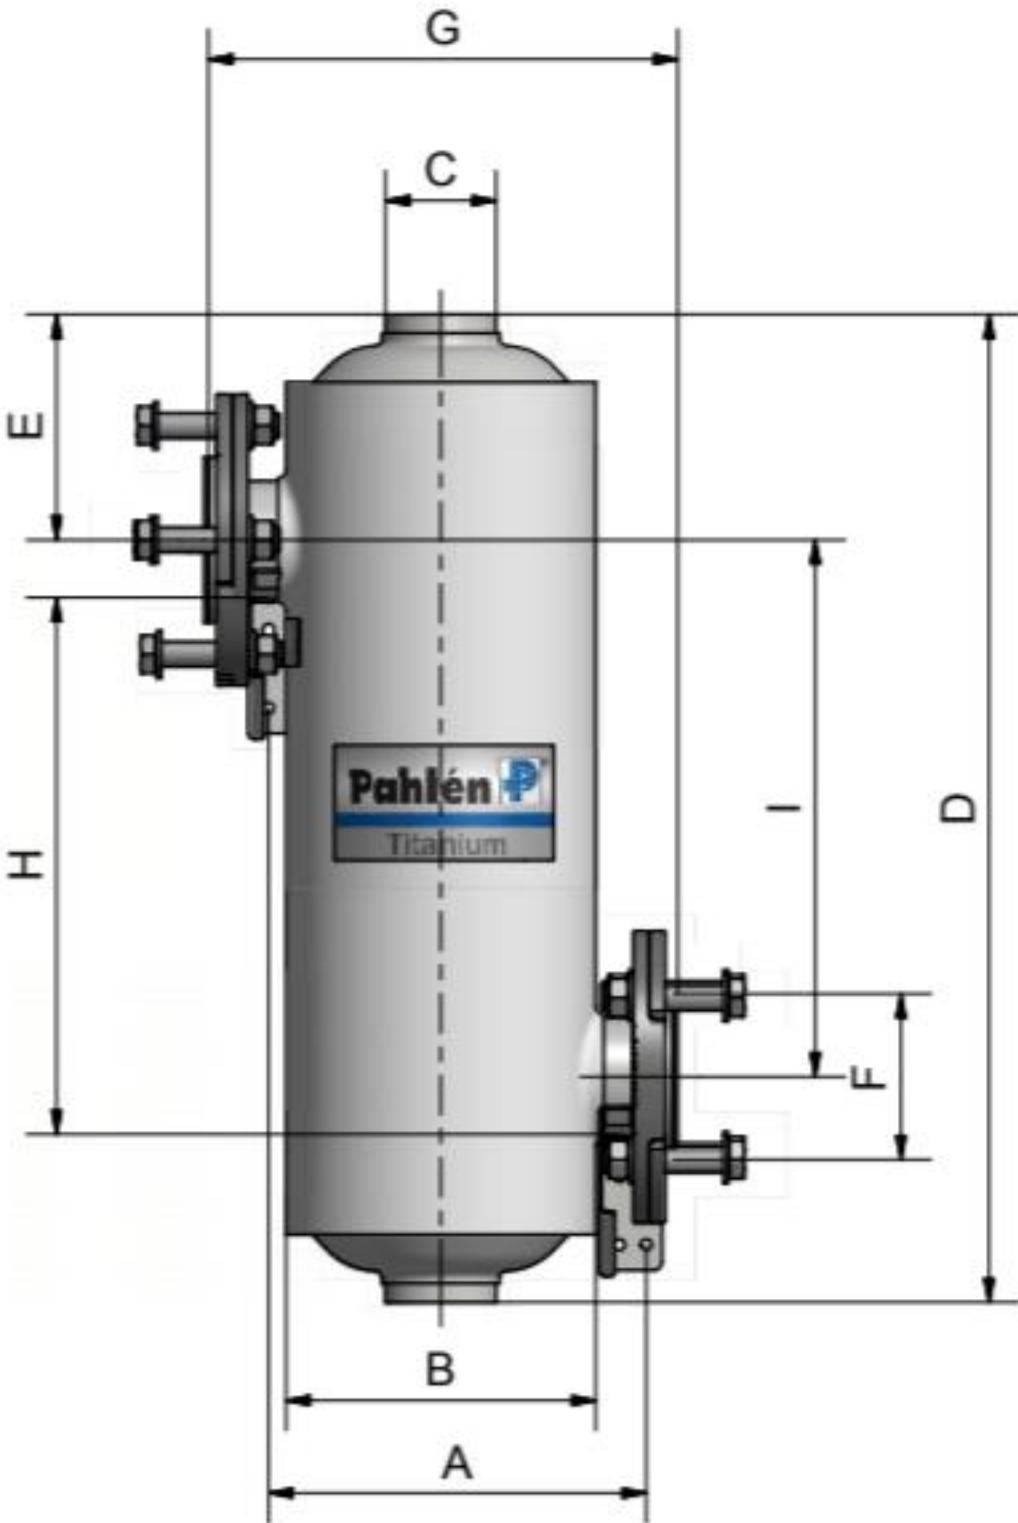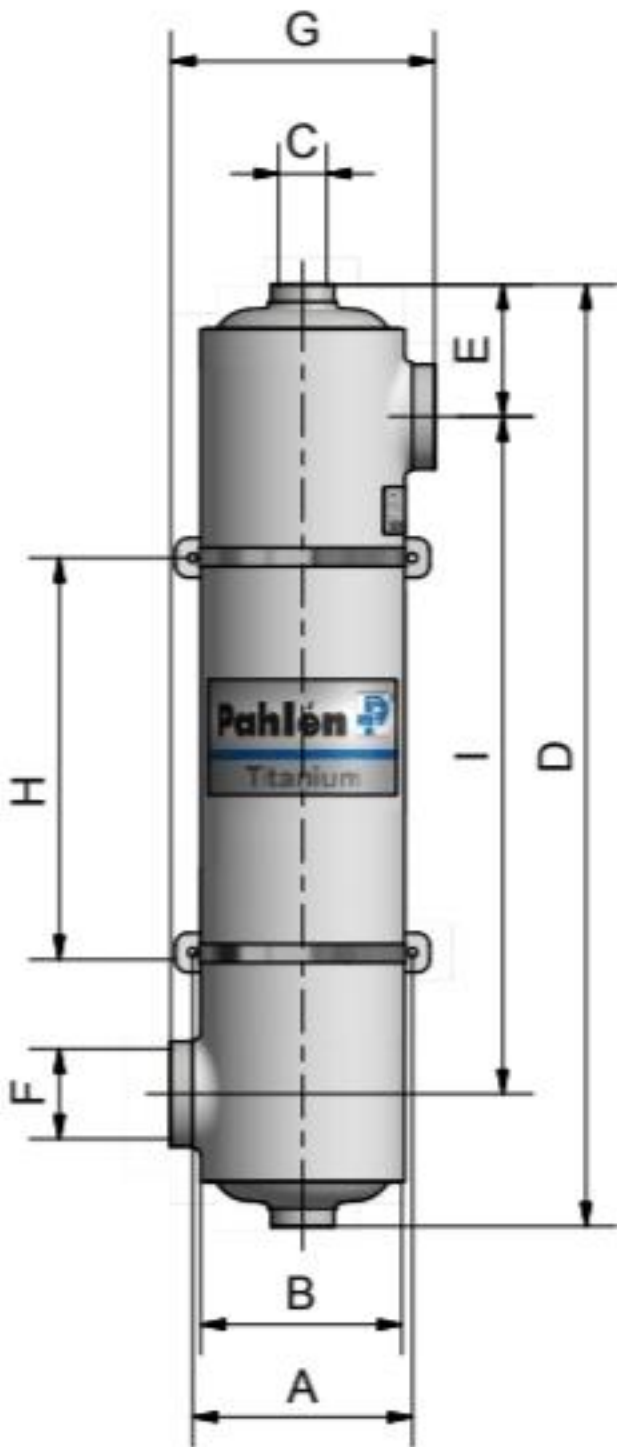

Model	A	B	C	D	E	F	G	H	I	J	Weight empty/filled
11377 - MFT260	139 mm	Ø129 mm	1"	597 mm	84 mm	2"	168 mm	250 mm	429 mm	82 mm	3/10 kg
11380 - MFT680	222 mm	Ø196 mm	2"	626 mm	143 mm	Ø75 (DN65)	294 mm	340 mm	340 mm	109 mm	8/24 kg